



### TRANSITION AT BRIDGE COLUMNS


Concrete Barrier Type 60MSF  
See Note 7

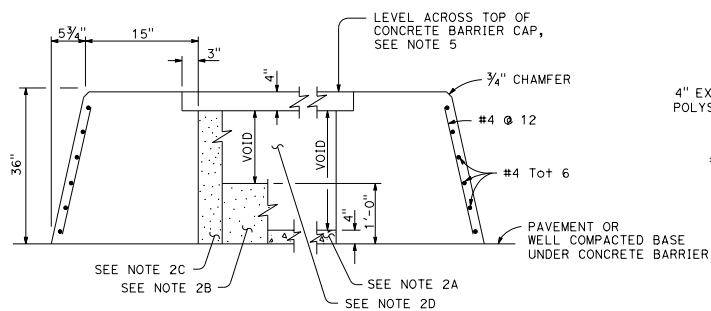

### SECTION A-A




### SECTION B-B

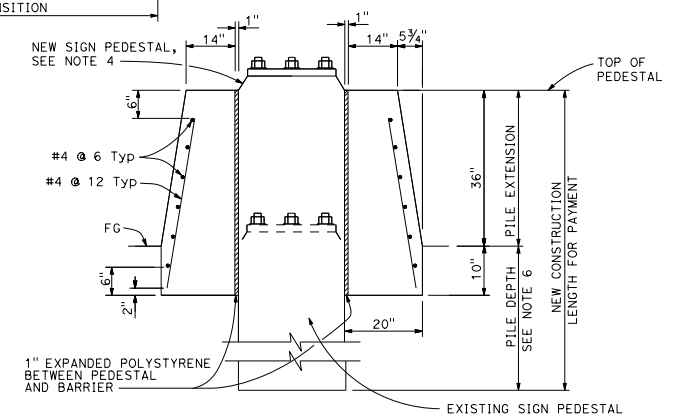

### SECTION C-C

#### NOTES:

- See Standard Plan A76G for Concrete Barrier Type 60MS.
- Contractor options for fill between concrete barrier walls:
  - Place 4" PCC at base between concrete barrier walls.
  - Place 1'-0" of granular material at base between walls.
  - Place granular material from base to bottom of 4" cap.
  - Monolithic concrete with foam blockouts is not permitted.
- Reinforcing steel shall extend continuous through construction joints.
- See Overhead Sign plans for sign pedestal elevations on new construction.
- Adjust height of concrete barrier wall on low side of offset or superelevated roadways to provide level grade across top of concrete barrier cap.
- See Overhead Signs Standard Plan Pile Foundation Tables.
- All locations with limited shoulder width available for barrier, see Standard Plan A76F for use of Concrete Barrier Type 60MGF.

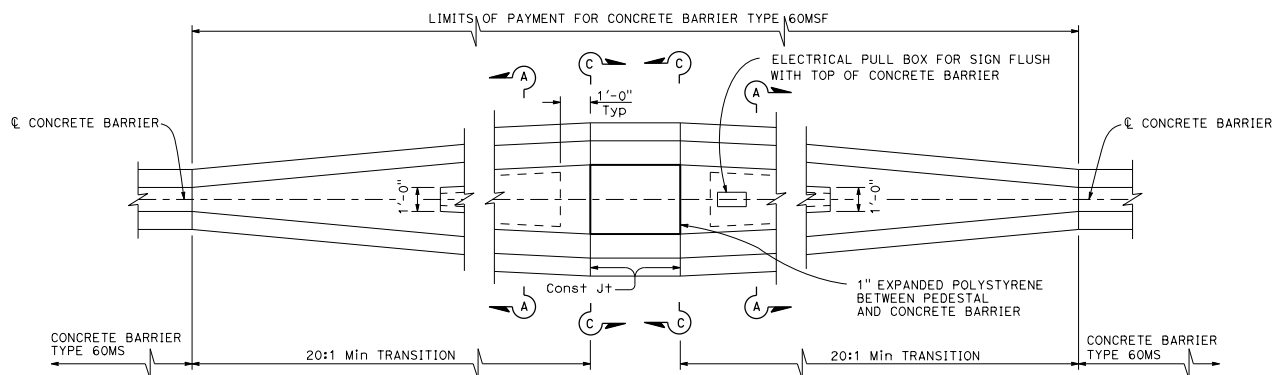

### TRANSITION AT SIGN PEDESTAL

Concrete Barrier Type 60MSF  
See Note 7

Dist	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET TOTAL SHEETS

*Randell D. Hiatt*  
REGISTERED CIVIL ENGINEER

May 31, 2018  
PLANS APPROVAL DATE

THE STATE OF CALIFORNIA OR ITS OFFICERS OR AGENTS SHALL NOT BE RESPONSIBLE FOR THE ACCURACY OR COMPLETENESS OF SCANNED COPIES OF THIS PLAN SHEET.

REGISTERED PROFESSIONAL ENGINEER  
No. C50200  
Exp. 6-30-19  
CIVIL  
STATE OF CALIFORNIA

STATE OF CALIFORNIA  
DEPARTMENT OF TRANSPORTATION  
**CONCRETE BARRIER TYPE 60MSF**  
NO SCALE

**A76I**